



# LG LX160 Motherboard Replacement

Written By: andrew toney



## INTRODUCTION

If nothing seems to work when trying to fix your phone, then more than likely a new motherboard is all you need to fix your phone. This guide will show you how to replace your motherboard.

---



### TOOLS:


- [Phillips #0 Screwdriver](#) (1)
  - [Tweezers](#) (1)
-

## Step 1 — Battery



- Place the phone on a flat surface that the back is facing you. Remove the back panel by placing your thumb on the LG logo and sliding the panel across the length of the phone until it is removed.

## Step 2

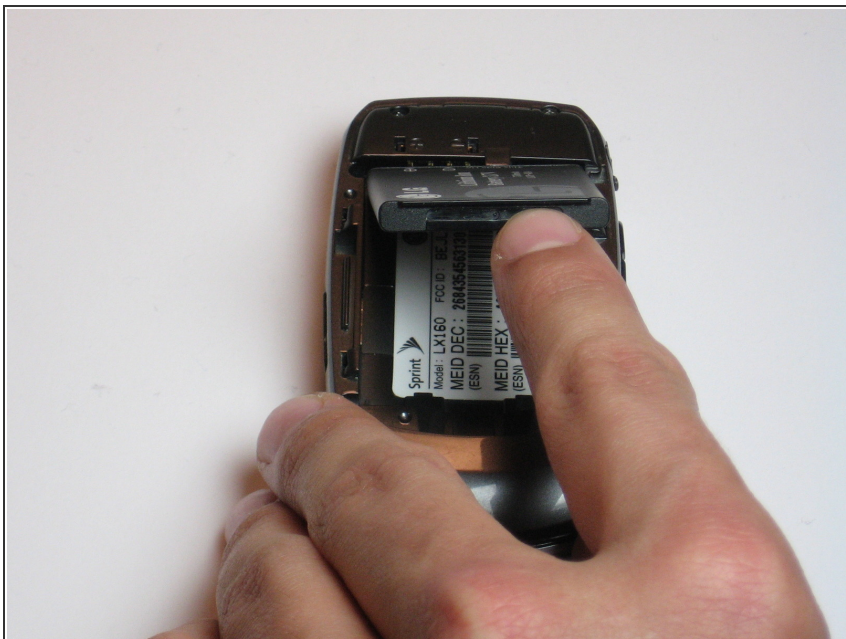

- Once the panel is removed, you are looking directly at the battery. It is the black rectangle in the middle of the phone. You can remove the battery by sliding a finger into the notch where the LG logo was on the panel and lifting up the battery.

## Step 3



- Remove the battery completely from the phone.



## Step 4 — Motherboard




- Before continuing pull off all the rubber tabs to the headphones, and the power input.

## Step 5




- Now turn the phone so that you can see the back where the battery was. Using a screw driver, unscrew the 6 screws holding the back casing together.

## Step 6

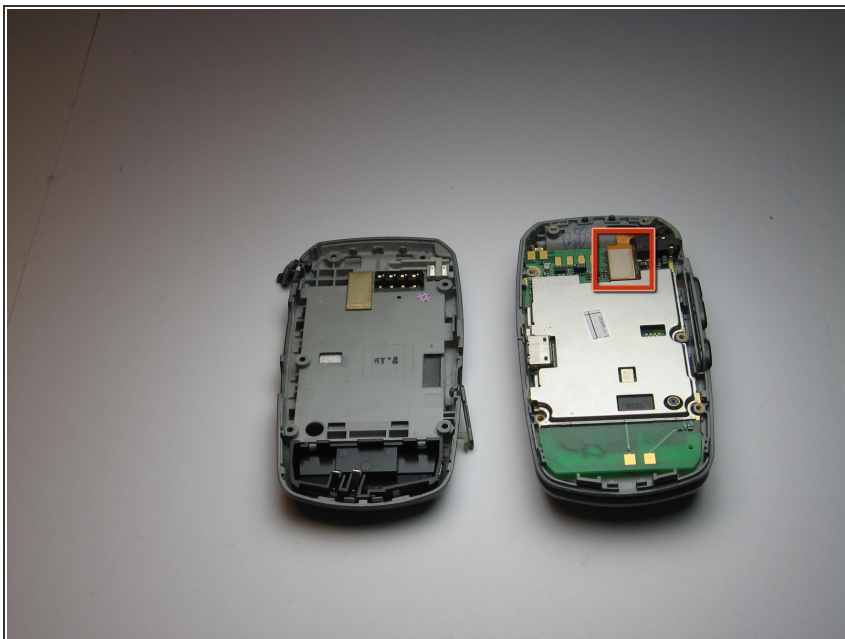


- At the top of the logic board there is a small rectangle with a white pad on it, use your tweezers and gently grip the neck of the orange wire.
- Gently pull up on the orange wire until it comes loose. It may take some force so do not be concerned with being overly gentle.

## Step 7

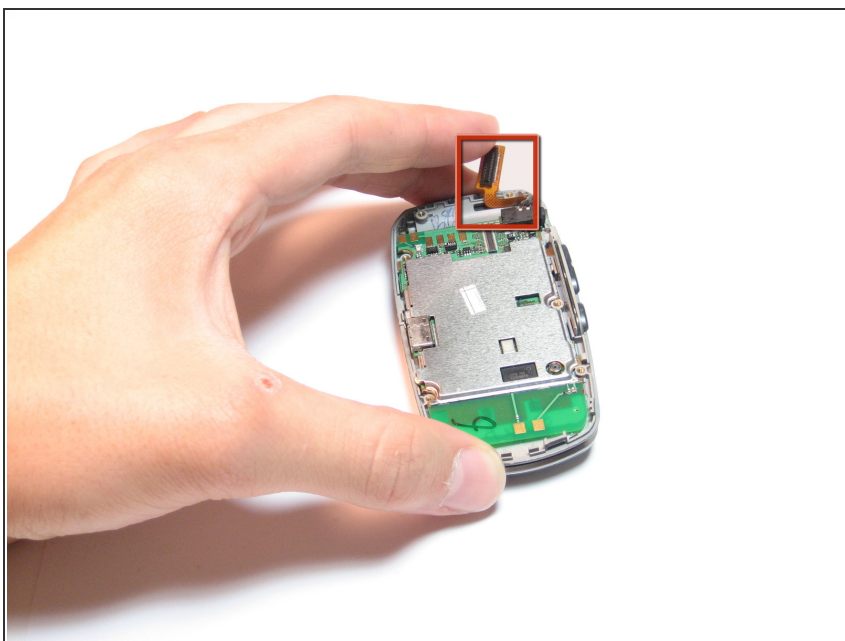

- After pulling on the orange wire it should come loose like the image.
- Be sure that the black chip on the underside of the orange wire is all the way out like in the picture before continuing to the next step.

## Step 8

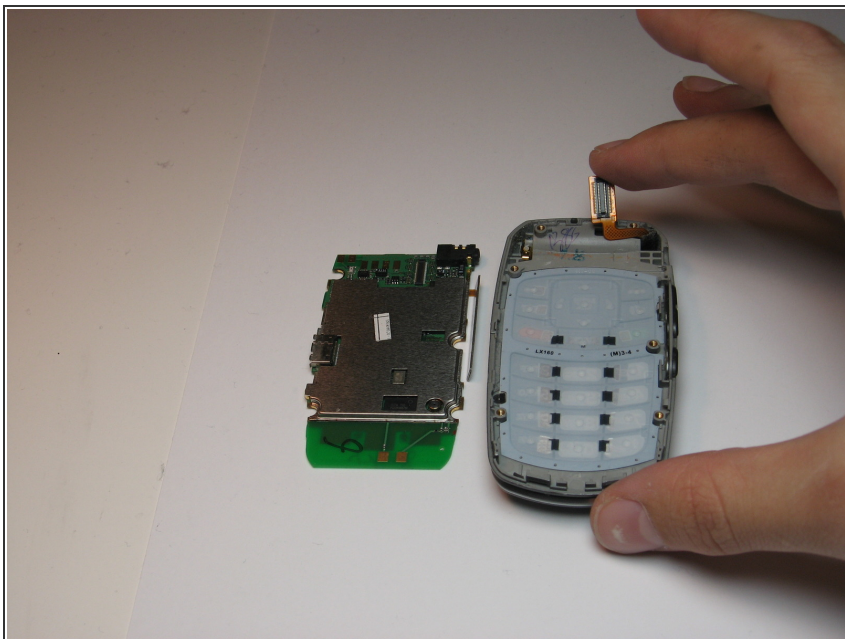

- Now you can remove the logic board from the casing, and set it aside.
- If you're replacing the logic board insert the board into the phone and attach the phone via the small orange tab

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-27 11:34:05 AM.